

# POWER & HAND TOOLS

# **RAJ INTERNATIONAL**

65, 4<sup>™</sup> Floor, Gaya Bldg, Y.M. Road, Masjid Bunder, Mumbai - 400 003 **T**: +91.93266 99276 | **E**: sales@xtremetools.in | **W**: www.xtremetools.in



www.xtremetools.in

**RAJ INTERNATIONAL** 

About Us

www.xtremetools.in
RAJ INTERNATIONAL

**RAJ INTERNATIONAL** was incorporated in the year 2012 by Mr. Huzaifa Madarwala for establishing his own brand of Power & Hand Tools products in India. His past experience of more than 10 years in the Hardware & Tools market has helped him to manufacturer the complete range of products with right quality and performance.

- The principal activities of RAJ INTERNATIONAL are to carry out business as MANUFACTURER IMPORTER, WHOLESALER of Power & Hand Tools and their related spares and accessories. Due to FAIR & HONEST policies with our customers, we have established strong network of Authorised Distributors in Indian market.
- Within few years, RAJ INTERNATIONAL was successful in establishing their XTREME POWER brand all over India by maintaining consistent quality, timely delivery & most reasonable price. We are regularly importing power tools and accessories in FCL lots to ensure timely availability.
- The unsurpassed quality and reliability of these power tools and other products are made possible by the Company"s continuous efforts to service INDIAN clients with utmost reliable and robust products which lasts long giving optimum performance. This have earned the TRUST of even end users who are always coming back asking for XTREME brand of products range as here below.

Cordless Tools, Drills, Cutters, Jig Saws, Planers, Hammers, Grinders, Sanders, Woodworking machines, Garden Tools, Chain Saws and Outdoor Power Equipment





### XTM-0810HD

Rated Power Input (W)	950
Rated Voltage (V)	220
Frequency	50/60Hz
No Load Speed (RPM)	3200



### XTM-DL835HD

Rated Power Input (W)	1200
Rated Voltage (V)	220
Frequency	50/60Hz
No Load Speed (RPM)	3200



## XTM-DL65HD

Rated Power Input (W)	1650
Rated Voltage (V)	220-240
Frequency	50/60Hz
No Load Impact Rate (MIN)	1800
Connection Type	SDS HEX
Impact Energy	48J



### XTM-DL11EHD

Rated Power Input (W)	1500
No Load Speed (RPM)	900-1890



### XTM-DGC135

Rated Power Input (W)	3200
No Load Speed (RPM)	5000
Grooving Capacity	135 MM
Rated Voltage (V)	220-230
Frequency	50/60Hz

# DRILLS



### XTM-6RF

Rated Power Input (W)	230
No Load Speed (RPM)	4500
Chuck Size	6.5 MM



### XTM-10RF

Rated Power Input (W)	400
No Load Speed (RPM)	2800
Chuck Size	10 MM



### XTM-ED10A

Rated Power Input (W)	300
No Load Speed (RPM)	2600
Chuck Size	10 MM



### XTM-13B

Rated Power Input (W)	550
No Load Speed (RPM)	2800
Chuck Size	13 MM



### IM-I3RE

Rated Power Input (W)	780
No Load Speed (RPM)	2800
Chuck Size	13 MM



### (IM-EIDI3

Rated Power Input (W)	600
No Load Speed (RPM)	1200
Drill Capacity	13 MM



GRINDER STAND

(IM-GS4/5





HAMMER DRILLS

X I M-20	
Max Drilling Capacity	20MM
No Load Speed (RPM)	0-850
Rated Power Input (W)	500



XTM-26	
Max Drilling Capacity	26MM
No Load Speed (RPM)	0-1100
Rated Power Input (W)	800

# DEMOLITION HAMMER



### XTM-0810T

Rated Power Input (W)	900
No Load Speed (RPM)	2900
Rated Voltage (V)	220
Frequency	50Hz



### XTM-PH65A

Rated Power Input (W)	1250
No Load Speed (RPM)	1300
Rated Voltage (V)	220
Frequency	50Hz



### XIM-DLIII

Rated Power Input (W)	1500
No Load Speed (RPM)	900-1890
Drill Capacity	30 MM

# **CHOPSAW**

# VIBRATORS



XTM-CO355	
Rated Power Input (W)	2200
No Load Speed (RPM)	3800
Blade Diameter	355 MM



XTM-355HD	
Rated Power Input (W)	2300
No Load Speed (RPM)	3800
Blade Diameter	355 MM



XTM-VR850	
Rated Power Input (W)	850
No Load Speed (RPM)	4000
Dia. Of Vibrating Head	35 MM



XTM-VRI050	
Rated Power Input (W)	1050
No Load Speed (RPM)	4000
Dia. Of Vibrating Head	35 MM

# GRINDERS

# XTM-6-100

Rated Power Input (W)	710
No Load Speed (RPM)	13000
Max.disc Diameter	100 MM



# XTM-801

Rated Power Input (W)	850
No Load Speed (RPM)	11000
Max.disc Diameter	100 MM



CUTTERS

### XTM-CM4SA

Rated Power Input (W)	1050
No Load Speed (RPM)	11000
Blade Diameter	110 MM
Max. Cutting Capacity	30 MM



### XTM-CM4SB

Rated Power Input (W)	1350
No Load Speed (RPM)	11000
Blade Diameter	110 MM
Max. Cutting Capacity	30 MM



# XTM-CM5

Rated Power Input (W)	1400
No Load Speed (RPM)	13000
Blade Diameter	125 MM
Max. Cutting Capacity	30 MM

07

XTM-1900B		
Rated Power Input (W)	500	
No Load Speed (RPM)	15000	
Max Planning Width	82 MM	
Max Planning Depth	1 MM	



XTM-EP82HQ		
Rated Power Input (W)	600	
No Load Speed (RPM)	16000	
Max Planning Width	82 MM	
Max Planning Depth	1 MM	



VT	$M_{-}$	DВ	76	12
$\sim$	мш		er I e	

Rated Power Input (W)	1800
No Load Speed (RPM)	23000
Collet Chuck Capacity	12 MM



	 4 -	7 JUL 100	,
X	4 1-1	S 12	4

Rated Power Input (W)	1800
No Load Speed (RPM)	22000
Collet Chuck Capacity	12 MM



# XTM-IR12L

Rated Power Input (W)	1800
No Load Speed (RPM)	23000
Collet Chuck Capacity	12 MM

JIG SAW



(TM-JS70S		
-----------	--	--

Rated Power Input (W)	700
No Load Speed (RPM)	3100
Max Cutting Capacity (Steel)	10 MM
Max Cutting Capacity (Wood)	50 MM

# BRUSH CUTTER



# XTM-BC2S

Engine	1.E36F
Displacement	48 CC
Engine Type	2 Stroke, Air Cooled
Power	1.7 KW
Fuel Tank	1.1 L



# XTM-BC4S

Engine	1.E36F
Displacement	31 CC
Engine Type	4 Stroke, Air Cooled
Power	1.7 KW
Fuel Tank	1.1 L



# XTM-5016N

Rated Power Input (W)	1300
No Load Speed (RPM)	400
Guide Bar Length	405 MM



# XTM-58HQ

Rated Power Input (W)	2200
No Load Speed (RPM)	3100
Displacement	58 CC
Fuel Capacity	550 ML
Oil Capacity	260 ML
Guide Bar Length	22"



# XTM-4016N

Rated Power Input (W)	1300
No Load Speed (RPM)	400
Guide Bar Length	405 MM



# XTM-62HQ

Rated Power Input (W)	2200
No Load Speed (RPM)	3100
Displacement	62 CC
Fuel Capacity	550 ML
Oil Capacity	260 ML
Guide Bar Length	22"



RUSH

m

# BLOWER



### XTM-GC40H(6)

Rated Power Input (W)	600
No Load Speed (RPM)	0-16000
Wind Volume	3.8m3/min



### XTM-FBC40

Rated Power Input (W)	550
No Load Speed (RPM)	0-13000
Wind Volume	2.5m3/min



/ I N	1-EI		
 		$\Box \leftarrow \iota$	J/ W/

Rated Power Input (W)	550
No Load Speed (RPM)	0-13000
Wind Volume	2.5m3/mii



### XTM-EP700

Rated Power Input (W)	700
No Load Speed (RPM)	10000r/min
Wind Volume	2.8m





XTM-CP180	
Rated Power Input (W)	1200
No Load Speed (RPM)	0-230
May Disc Dia	190 MM

# MIXER



1-FM1	

Rated Power Input (W)	1050
No Load Speed (RPM)	780
Paddle	120 MM



# XTM-EM160A (2)

Rated Power Input (W)	1050
No Load Speed (RPM)	780
Paddle	120 MM

# HOT AIRGUN



## XTM-HG2000

Rated Power Input (W)	2000
Temperature	50°-600°C
Air F <b>l</b> ow	280-480L/mir

# SCREW DRIVER



### XTM-SD10B

Rated Power Input (W)	400
No Load Speed (RPM)	0-750
Max Drilling Capacity	10 MM



### XTM-SD10LED

Rated Power Input (W)	400
No Load Speed (RPM)	0-750
Max Drilling Capacity	10 MM



### XTM-SD10H

Rated Power Input (W)	350
No Load Speed (RPM)	0-750
Max Drilling Capacity	10 MM




















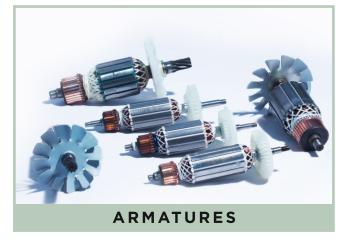















www.xtremetools.in
RAJ INTERNATIONAL

XTREME